


Appendix


Delivery & Storage Information




Truck Delivery Methods

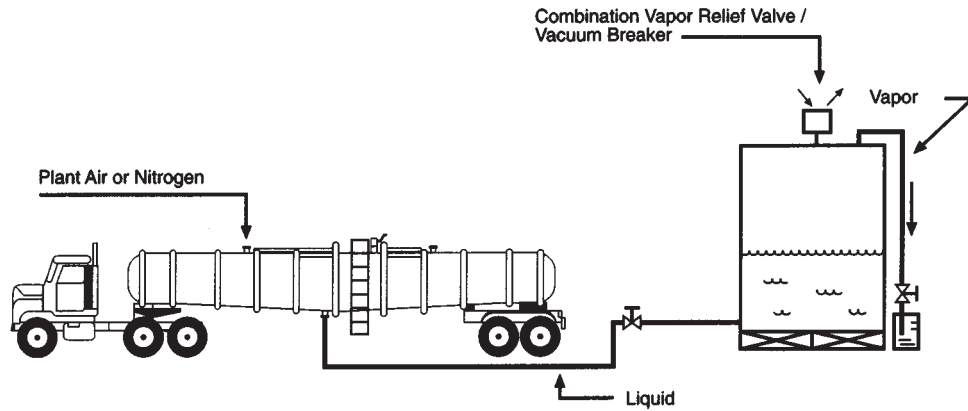

Pressure Method

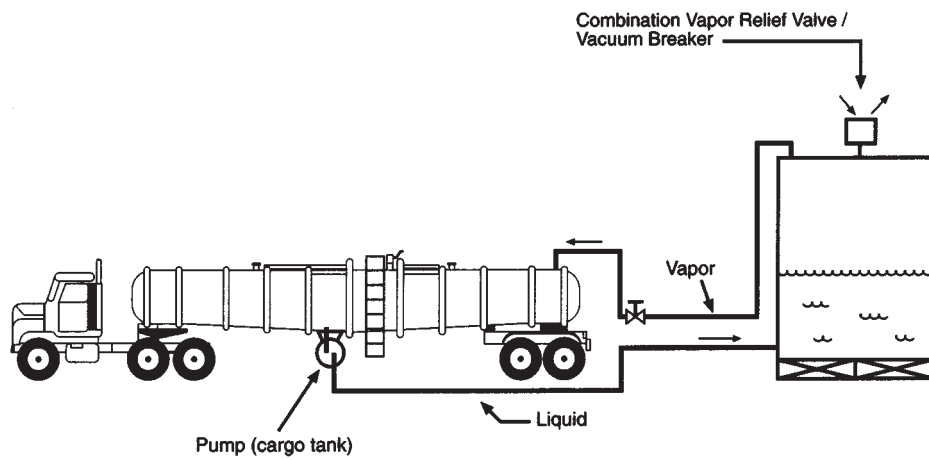


Pump Method "A"

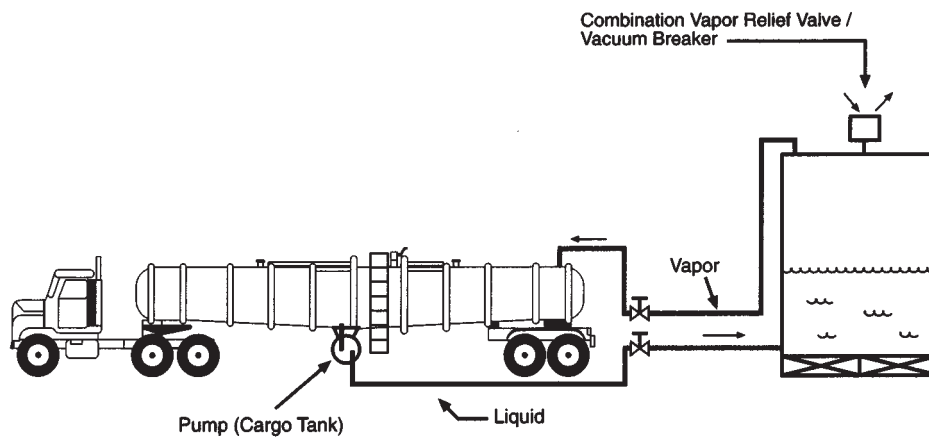

Pump Method "B"

TYPICAL HORIZONTAL AQUA AMMONIA STORAGE TANK

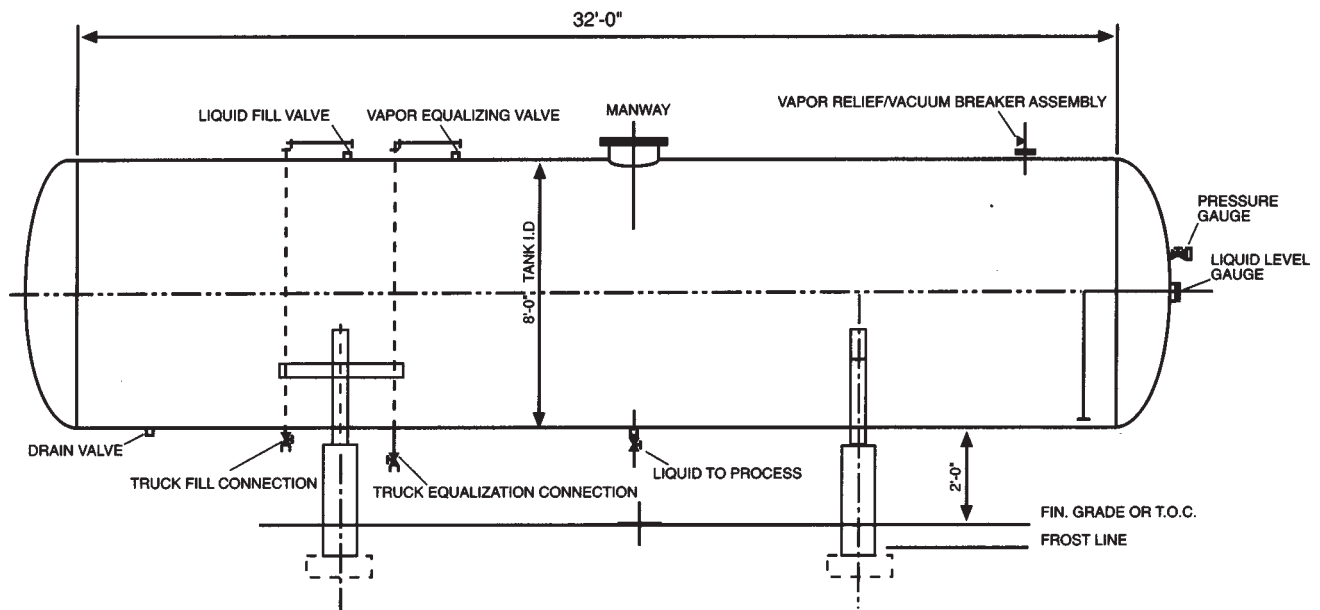

The 12,000 gallon aqua ammonia storage tank shown above can store approximately 85,000 lbs. of 26° Bé (29.4%) aqua ammonia. Although vented atmospheric pressure tanks are used by some aqua consumers, Airgas Inc. recommends the use of a minimum 25 PSIG design working pressure storage vessel built in accordance with the ASME Code for Unfired Pressure Vessels (Section VIII). The vessel can be fabricated from carbon steel, aluminum, or stainless steel.

A typical arrangement of tank openings which is suitable for most storage system requirements is shown in the drawing. See reverse side for additional information. It is possible, however, to order tanks with size dimensions and schedules of openings to meet any specific user requirement. For further information about storage systems for aqua ammonia, contact Airgas Inc.

TB-8-8
Page 1 of 2
Rev. 1/90

The technical data in this bulletin is based on information which we believe to be accurate. However, nothing in this bulletin is to be construed as an expressed or implied warranty regarding the accuracy of the data or the use of any of the products herein described. Nothing contained herein should be considered as a recommendation for the use of any product or method in violation of any patent now effective or which may issue hereafter. All risks of liability rest solely with the user of the data or products herein described.

Airgas
 You'll find it with us.™
 6340 Sugarloaf Parkway
 Duluth, GA 30097
 (770) 717-2200

Functions of Storage Tanks Components

Liquid Fill Line

The liquid fill line allows the transfer of product from the delivering cargo tank. It consists of a quick disconnect fitting and shutoff valve at the truck liquid fill connection point, fill line piping, and shutoff valve located on the top of the tank.

Equalizing Line

The vapor equalizing line allows equalization of pressure to occur between the vapor space of the storage tanks and the vapor space of the delivering cargo tank. It consists of a quick disconnect fitting and shutoff valve at the truck vapor equalizing connection point, equalizing line piping, and a shutoff valve located on top of the tank.

Vapor Pressure Relief/Vacuum Breaker Valve

A combination pressure relief valve and vacuum breaker protects the storage vessel from pressure in excess of the design working pressure and from sub-atmospheric pressures.

Liquid Level Float Gauge

The dial on this float gauge is calibrated in percentage of total tank volume to indicate the volume of aqua ammonia in the storage tank. A metal bulb floating on the surface of the aqua ammonia actuates an indicator pointer on the dial.

Pressure Gauge

The pressure gauge indicates the internal pressure in the storage tank. A pressure gauge calibrated from 30" vacuum to about 50 PSIG can be used if an indication of sub-atmospheric pressure is desired.

Liquid To Process Valve


Piping from this valve is connected to the consumer's process.

Drain Valve

This valve is used to remove product from the storage tank of the performance of some maintenance procedures or for the removal of the tank from service.

AQUA AMMONIA TERMINOLOGY

Confused by aqua ammonia terminology and billing procedures?
Contained vs. solution basis? Delivered vs. FOB?
Wet vs. dry? Pounds vs. tons vs. gallons?

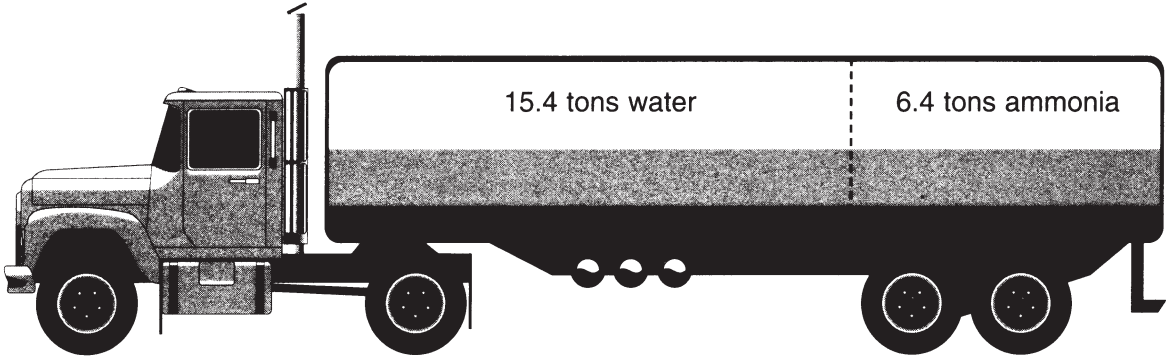

This trailer holds 6.4 tons of “contained” ammonia or “dry” ammonia product. The total weight of the load is 21.8 tons. This is called the “solution” weight or “wet” weight.

Airgas Inc. bills aqua ammonia on a contained ammonia basis. Freight costs are billed on a solution basis. Suppose that your contained ammonia product cost is \$420.00 per ton and that your freight rate is \$15.00 per ton. The invoice for this truck load would be calculated as follows:

Ammonia	6.4 tons X \$420/ton = \$2,688.00
Freight	21.8 tones x 15/ton = \$327.00
	Total: \$3,015.00

Another method for billing uses a solution or “wet” basis. The solution weight for this trailer is 21.8 tons. For the cost conditions given above, the first line of the invoice would read 21.8 tons x \$123.30/ton = \$2,688.00. Both invoices would show the same total dollar amount. The solution or “wet” price per ton is much less, but remember that you are being charged for the ammonia and the water.

Delivered pricing on a contained ammonia basis is a little more complicated. In the example above, the total freight cost was \$327.00. To establish a freight rate based on contained ammonia, it is necessary to divide the freight cost (\$327.00) by 6.4 tons. This calculates to \$51.10 freight per ton of contained ammonia. Therefore, the delivered price is \$471.00 per ton (contained ammonia basis).

At a concentration of 29.4%, aqua ammonia weighs 7.5 lbs/gallon. A trailer containing 21.8 tons of aqua ammonia has a product volume equal to 21.8 tons x 2,000 lbs/ton x 1 gallon/7.5 lbs or 5,813 gallons. Degrees Baumé is a measurement system for specific gravity (density). Aqua ammonia with a specific gravity (density) of 26 ° Baumé has an ammonia weight concentration of 29.4%

TB 5-3
3/96

The technical data in this bulletin is based on information which we believe to be accurate. However, nothing in this bulletin is to be construed as an expressed or implied warranty regarding the accuracy of the data or the use of any of the products herein described. Nothing contained herein should be considered as a recommendation for the use of any product or method in violation of any patent now effective or which may issue hereafter. All risks of liability rest solely with the user of the data or products herein described.

Contents of Appendixes

Baumé / Specific Gravity / Temperature / Concentration Table for Ammonium Hydroxide	16-17
Table of Corrections To Aqua Ammonia Sp. Gr. Readings To Compensate For Sampling Temp. Variations	18
Table of corrections To Aqua Ammonia Baumé Readings To Compensate For Sampling Temp. Variations	19
Aqua Ammonia Concentration Conversions	20
Absolute Pressure of Ammonia-Water Solutions	21
Partial Vapor Pressure of Ammonia Over Aqua Ammonia	22
Partial Vapor Pressure of Water Over Aqua Ammonia	23
Total Vapor Pressure (Ammonia + Water) Over Aqua Ammonia	24
Total Vapor Pressure of Ammonia-Water Solutions	25
Ammonia/Water Solubility At 1 Atmosphere	26
Freezing Point of Aqua Ammonia	27
Boiling Points of Ammonia Solutions	28
Analytical Procedure-Ammonium Hydroxide (Aqua Ammonia) Technical Grade	32
Analytical Procedure-Ammonium Hydroxide (Aqua Ammonia) Tech. Grade (Procedure for Sp. Gr. Test)	32
Analytical Procedure-Ammonium Hydroxide (Aqua Ammonia) Tech. Gr. (Procedure for Assay by Titration	33
Analytical Procedure-Ammonium Hydroxide (Aqua Ammonia) FCC	34
Arsenic Test	35-36
Heavy Metals Test	37
Hazardous Materials Table (49 CFR 172.101)	40
Non-Bulk Packagings For Liquid Hazardous Liquid And Solid Materials (49 CFR 173.203)	41
Bulk Packagings For Certain Low Hazard Liquid And Solid Materials (49 CFR 173.241)	42
Truck Delivery Methods	43
Technical Bulletin #8-Typical Horizontal Aqua Ammonia Storage Tank	44
Functions of Storage Tank Components	45
Technical Bulletin #5-Aqua Ammonia Terminology	46